




• Variety of applications

• Flexibility of design


• Excellent weather performance

Window and door system

MB-59S

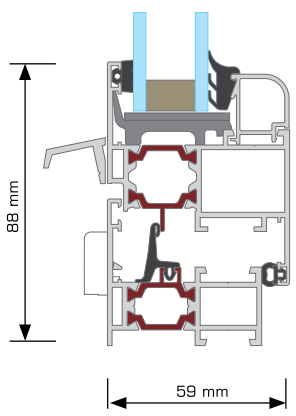

Opening window - cross-section

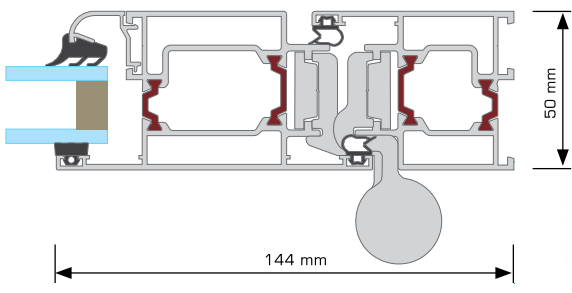


Door - cross-section


The MB-59S System has been designed to give architects an integrated window and door system, allowing flexibility of design whilst at the same time as providing good thermal and acoustic insulation. It is the starting point for any specifier and provides a multitude of options for window projects; Tilt&turn, Tilt&slide, side hung, bottom hung, pivot and also an open out option for top hung and side hung. They are also available in high thermal insulation variety name HI.



MB-59S / MB-59S HI



Opening window - cross-section


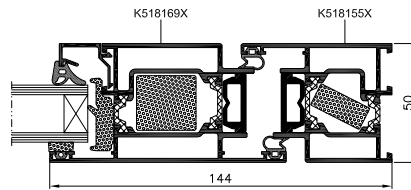


Door - cross-section



The standard tilt and turn variety offers great value for money. It is ideal for limited budget projects with basic thermal and acoustic requirements. It is suitable for installation in low or medium rise buildings for commercial and domestic, new build or refurbishment projects.

MB-59S Casement / MB-59S Casement HI



Outward opening window - cross-section



The casement window features modern structure designed to get more out of its thermal performance in compliance with building regulations. It is available as a top or side hung window and has multi point locking and fixed restrictors with adjustable friction for enhanced security.

